



pk trucks holland

Showroom: Graanweg 2 (M200)
4782 PP Moerdijk
The Netherlands

Tel. : +31 168 382 032
Fax : +31 168 382 023
E-mail: pktrucks@pktrucks.com

SPECIFICATION

Type: 100T TANDEM SWIVEL AXLES LOW-BED SEMI-TRAILER

Model: THT91204TD

DIMENSION:

Overall Length:	14,430mm
Overall Width:	3,700mm
Overall Height:	3,420mm
King Pin Setting:	600 mm
Wheel Span:	10,639 mm
Axle Spacing:	1,562 mm
Loading Platform Length:	10,000mm
Unladen Platform Height:	1,360mm
King Pin Plate Height :	1,344mm
Rear tractor clearance radius:	2,400mm (The max rear fitting radius of semi-trailer vehicle is 2300mm)

RUNNING GEAR:

Suspension And axles :	Heavy duty walking beam suspension. Four axles suspended on two longitudinal beams.
Brake:	Dual Line Pneumatic Brake System with Emergency relay valve, without ABS.
Parking Brake:	Type 30/30 spring brake on all axles
Wheel:	8.5-20,10 holes Steel Disc,17 Pcs (One as spare wheel) ,made in china.
Tire:	12.00R20 18 Ply Rating, 17 Pcs (One as spare tire),
King Pin :	3.5" , bolted type; Model: JOST KZ1016. Attached a 2" king pin (Model: JOST KZ1516).
Spare tire carrier:	Two sets.
Loading ramps:	2 Pcs. 720mm width. Ramps are spring loaded and manually operated with safety chain.
Painting:	Coated with anti-rust and a coating of finishing paint (standard color)


www.pktrucks.com



pk trucks holland

Showroom: Graanweg 2 (M200)
4782 PP Moerdijk
The Netherlands

Tel. : +31 168 382 032
Fax : +31 168 382 023
E-mail: pktrucks@pktrucks.com

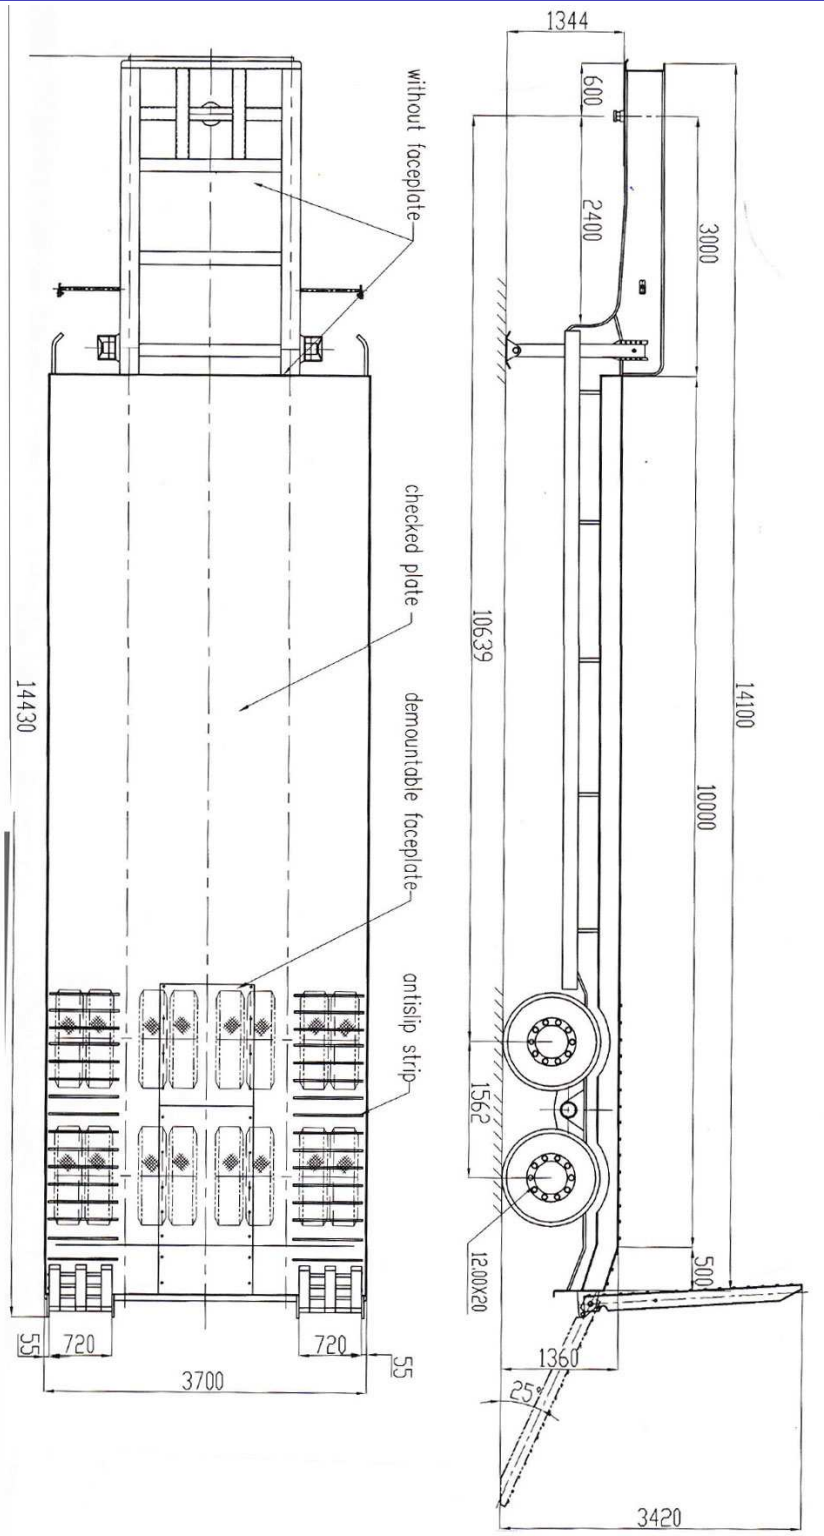

www.pktrucks.com